

Rotary®



WHEEL BALANCERS

ROTARY WHEEL SERVICE EQUIPMENT

ALIGN **TRUCKS** **Performance** **BALANCE** **Reliable** **Simple**
Dependable **INSPECT** **EFFICIENT** **LEADER** **FASTER** **WHEELHOUSE** **QUALITY** **HEAVY DUTY**
Easier **TECHNOLOGY** **ACCURATE** **CARS** **CHANGE**
Patented **Analyze** **VERSATILE** **Commercial** **Trusted** **Passenger**
Innovative



www.rotarywheelservice.com

R180 PRO 3DAUTO

3D TECHNOLOGY ELECTRONIC BALANCER with MICROPROCESSOR

EQUIPPED WITH AUTO WHEEL DIMENSION SONAR and LASER RIM SCANNER

PERFECT BALANCING WITH MAXIMUM SPEED AND PRECISION


AUTOMATIC BALANCING MODE

The R180 saves time and material cost.

Faster efficient balancing reduces wheel weight consumption while reducing spins and repositioning time lost. Interactive screen output identifies hidden weight location position, provides detailed analysis for precision weight placement.

AUTOMATIC LOCK IN POSITION

Automatic start when the cover is lowered.

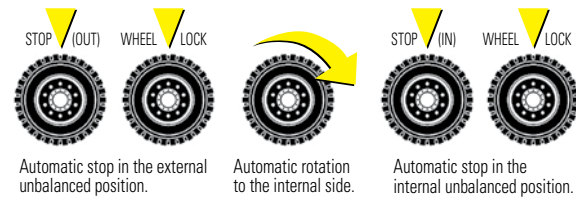

AUTOMODE

After lowering the hood the sonar automatically detects wheel dimension.

- The laser scans rim profile
- Balancing program is auto selected
- Adhesive weights are positioned and memorized
- Wheel spoke quantities are checked and position for proper location of hidden weights is located
- Easily switch readout from ounces to grams

PROGRAM FEATURES



MONITOR KEYBOARD
Linked directly to a standard monitor, this durable touchpad allows for a "gloved" input with the convenience of a touch screen monitor.

GUIDED BALANCING PROCEDURE

The functions related to each key vary according to use and are identified by icons on the display for easier understanding. Residual static readings are displayed throughout service functions.



SPOKE

Hidden weight program



SPLIT PROGRAM



ALU-S

3 automatic ALU S programs



QUICK LOCK



LASER WHEEL SCANNER

The laser pointer indicates the exact positioning for weights

STANDARD ACCESSORIES

OPTIONAL ACCESSORIES SEE PAGE 5



GAR 111
Passenger tire cone kit
1.75" - 4" (44-104 mm)



GAR 345
Large quick nut replacement lock



Caliper and Pliers



GAR 112
Light truck cone
3.75" - 5" (95-124 mm)



SCAN CODE FOR PRODUCT VIDEO

TECHNICAL DATA	R180
Rim diameter	10" - 30 automatic
Rim width	1.5" - 22"
Max. tire diameter	44"
Max. assembly weight	176 lbs. (80kg)
Read out accuracy	1 g
Cycle time	6 seconds
Rotation speed (rpm)	<100
Power supply	110v / 60 Hz / 10


R155 PRO3D

3D TECHNOLOGY ELECTRONIC BALANCER with MICROPROCESSOR

ALL THE FEATURES FOR THE MOST DEMANDING PROFESSIONALS

AUTOMATIC LOCK IN POSITION

Automatic start when the cover is lowered.

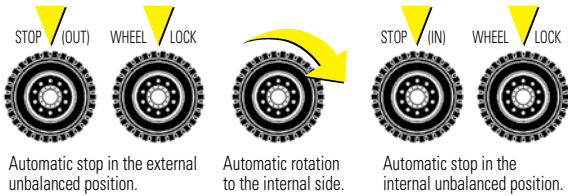

EASY OPERATION

Interactive inputs guide tech during all phases of the balancing process.



Automatic storage of distance and diameter.



Automatic programs.

INTERNAL DATA ARM



Quick selection and rim run-out measurement with internal data gauge.



LINKED KEYBOARD



MONITOR KEYBOARD

Linked directly to a standard monitor, this durable touch-pad allows for a "gloved" input with the convenience of a touch screen monitor.

STANDARD ACCESSORIES

OPTIONAL ACCESSORIES SEE PAGE 5



HW150400132 / 2.07-6.7" (52.5-110.7mm)

Seven-piece Pro Collet Kit 40mm

- Clad Wheel Problem Solver
- Static Imbalance Solution
- Lower Taper For Better Mounting
- No Wheel Hub Interference



Caliper and Pliers



GAR 345
Large quick nut replacement lock



GAR 112
Light truck cone
3.75" - 5" (95-124 mm)



QUICK LOCK



DOUBLE LED



WIDTH GAUGE

3D wheel tire sensor caliper for automatic measure of rim width



LASER BLADE

The laser pointer indicates the exact positioning for weights



SCAN CODE FOR PRODUCT VIDEO

TECHNICAL DATA	R155
Rim diameter	10" - 30"
Rim width	1.5" - 22"
Max. tire diameter	44"
Max. assembly weight	154 lbs. (70kg)
Read out accuracy	1 g
Cycle time	6 seconds
Rotation speed (rpm)	<100
Power supply	110v / 60 Hz / 10


R148PRO2D

2D TECHNOLOGY ELECTRONIC BALANCER with MICROPROCESSOR

EQUIPPED WITH AUTO WHEEL DIMENSION CALIPER
PERFECT BALANCING WITH AUTOMATIC MEASUREMENT OF WHEEL
DISTANCE AND DIAMETER.

AUTOMATIC LOCK IN POSITION

Automatic start when the cover is lowered.

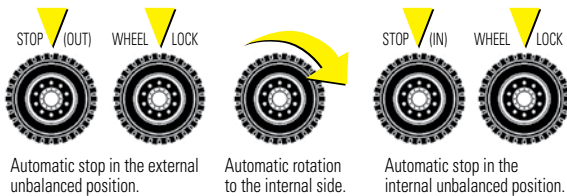

AUTOMATIC DISTANCE + DIAMETER MEASUREMENT

Caliper for automatic distance and diameter measurement.
Automatic ALU S program.



LARGE DIGITAL DISPLAYS

12 PROGRAM FEATURES
FOR CAR, LIGHT TRUCK
AND MOTORCYCLE WHEELS



TECHNICAL DATA	R148
Rim diameter	10" - 30 automatic
Rim width	1.5" - 22"
Max. tire diameter	44"
Max. assembly weight	154 lbs. (70kg)
Read out accuracy	1 g
Cycle time	6 seconds
Rotation speed (rpm)	<100
Power supply	110v / 60 Hz / 10

STANDARD ACCESSORIES

OPTIONAL ACCESSORIES SEE NEXT PAGE



HW150400132 / 2.07-6.7" (52.5-110.7mm)

Seven-piece Pro Collet Kit 40mm

- Clad Wheel Problem Solver
- Static Imbalance Solution
- Lower Taper For Better Mounting
- No Wheel Hub Interference



Caliper and Pliers



**GAR 345
Large quick nut
replacement lock**



**GAR 112
Light truck cone
3.75" - 5" (95-124 mm)**

R138SHOP

2D LOW ROTATION SPEED FIRST LEVEL COMPUTERIZED BALANCER

Motorized balancer at a great value compliments any shop.

Its small footprint and lower rotational speed offers features even the most demanding operator will appreciate. A heavy-duty 40mm shaft, large 10.5" offset for deep rims, easy to read display and standard accessories completes this great package.

PROGRAM FEATURES



AUTO STOP ON TOP AUTO LOCK

Automatic start when the cover is lowered and automatic stop of the wheel in the external unbalanced position.



CALIPER FOR AUTOMATIC DISTANCE + DIAMETER MEASUREMENT

Automatic ALU S program

STANDARD ACCESSORIES



GAR 111
Passenger tire cone kit
1.75" - 4" (44-104 mm)



Caliper and Pliers



GAR 112
Light truck cone
3.75" - 5" (95-124 mm)



GAR 101
Quick nut
replacement lock



**LARGE DIGITAL
DISPLAY**



**Includes HIDDEN
WEIGHT program**

TECHNICAL DATA	R138
Rim diameter	10" - 26"
Rim width	1.5" - 22"
Max. tire diameter	35.4"
Maximum assembly weight	143 lbs. (65kg)
Read out accuracy	1 g
Cycle time	6 seconds
Rotation speed (rpm)	<100
Power supply	110v / 60 Hz / 1Ø

OPTIONAL ACCESSORIES / R180 / R155 / 148 / 138 BALANCERS



GAR113
Light truck cone
4.65" - 6.8" (118-174mm)
Vans and light trucks



SHOWN: HW210400002
Series IV Quick Plate Kit 40mm

HW200299409
North American Flange Plate Kit 40mm

HW150400110
2.07" - 4.76" (52.5mm-122mm)
**Nine-piece Pro Collet
Kit 40mm**

- Clad Wheel Problem Solver
- Static Imbalance Solution
- Lower Taper For Better Mounting Surface with No Wheel Hub Interference
- Includes collets #1 thru #9



GAR124 Spacer for all balancers
May be used with GAR112 and the #8, 9, 10 & 11 collets



GAR324 Wheel lift with automatic compensation of wheel weight
Memorizes wheel weight - when the wheel is removed from the balancer, there are no forces on balancer shaft.

GAR325 Wheel lift / standard version

R544PRO

TRUCK 2D


MICROPROCESSOR CONTROLLED WITH SELF-CALIBRATION / DIAGNOSTICS
 SPECIFIC BALANCING PROGRAMS FOR STATIC, DYNAMIC and ALU WHEELS.

FAST AND ACCURATE BALANCING OF COMMERCIAL TRUCK WHEELS

One single spin with low rotation speed provides all the values. Readout of out of balance values and the related position on the wheel. Wheel diameter and width in inches or millimeters. Unbalance readout in grams or ounces.

AUTOMATIC LOCK IN POSITION

Automatic start when the cover is lowered.

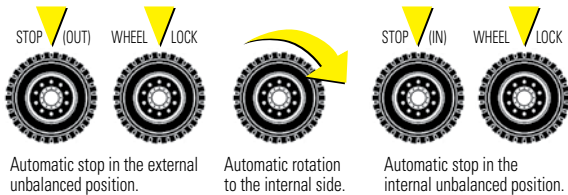

STANDARD AIR TIRE LIFT
 441 Lbs. capacity



2D AUTOMATIC DATA INPUT
 Digital caliper with optical sensor, with alloy shaft sliding bushes. Automatic storage of distance and diameter up to 26".



PRECISION WHEEL LIFT



AIR LOCK IN POSITION



SPEED



Shown with optional GAR266T width sensor arm

AIR LOCK
 Pneumatic locking of the wheel.



AIR BRAKE
 An electro-pneumatic brake keeps the wheel in the unbalance position.

MONITOR KEYPAD



19" FULL COLOR MONITOR

STANDARD ACCESSORIES

OPTIONAL ACCESSORIES SEE NEXT PAGE



CALIBRATION KIT
 Width Calipers
 Weight Pliers
 Calibration Weight




GAR 122 Truck spacer **GAR 114 202/221/281 2 Cones for trucks**
 7.9" - 8.7" - 11"



GAR 351
 Standard air lock nut

DIMENSIONS



SCAN CODE FOR PRODUCT VIDEO

TECHNICAL DATA	R544
Rim diameter	10" - 30"
Rim width	1.5" - 22"
Max. tire diameter	51"
Maximum assembly weight	441 lbs. (200kg)
Read out accuracy	10 g 1 g
Rotation speed (rpm)	100 80
Power supply	110v / 60 Hz / 10

R540RTLD


TRUCK 2D

2D TECHNOLOGY

ELECTRONIC BALANCER with MICROPROCESSOR

AUTO STOP ON TOP / AUTO LOCK

Automatic stop of the wheel in the external unbalanced position.



AUTOMATIC BALANCING MODE

Versatile machine designed for easy, fast and accurate balancing of motorcycle, car and commercial wheels.

Microprocessor controlled with self-calibration and self-diagnostics.

Specific balancing programs for static, dynamic and ALU wheels. One single spin with low rotation speed provides all the values. Readout of out of balance values and the related position on the wheel. Wheel diameter and width in inches or millimeters. Unbalance readout in grams or ounces.

STANDARD ACCESSORIES



GAR 111
Passenger tire cone kit
1.75" - 4" (44-104 mm)



CALIBRATION KIT




GAR 344
Quick lock



AIR BRAKE
An electro-pneumatic brake keeps the wheel in the unbalance position.

STANDARD AIR TIRE LIFT
441 Lbs. capacity

DIMENSIONS



GAR 112
Light truck cone
3.75" - 5"
(95-124 mm)



GAR 113
Light truck cone
4.65" - 6.8"
(118-174 mm)



GAR 122
Truck spacer



GAR 114 202/221/281
2 Cones for trucks
7.9" - 8.7" - 11"

GAR124 Spacer
May be used with GAR112 and the #8,9,10,11 collets

TECHNICAL DATA	R540
Rim diameter	10" - 30
Rim width	1.5" - 22"
Max. tire diameter	51"
Maximum assembly weight	441 lbs. (200kg)
Read out accuracy	10 g 1 g
Rotation speed (rpm)	100 80
Power supply	110v / 60 Hz / 10

OPTIONAL ACCESSORIES / R544 / R540 BALANCERS

CAMION / TRUCK / LKW APPLICATION

GAR 171 three finger adapter
(3X170, 186, 205, 222, 245)

GAR 172 four finger adapter
(4X275, 285) 202-221-281

GAR 173 five finger adapter
(5X225, 286, 335)



SHOWN: GAR 172
Four finger adapter



HW700E400020
Truck centering disc
Fits 219.9mm / 8.65"
and 220.8mm / 8.69"
Requires GAR173
and/or GAR172 for use



GAR 266T
WIDTH SENSOR
3D wheel tire sensor caliper for automatic measure of rim width

PASSENGER CAR / LIGHT TRUCK APPLICATION



GAR 111
Passenger tire cone kit
1.75" - 4" (44-104 mm)



GAR 112
Light truck cone
3.75" - 5" (95-124 mm)



GAR 113
Light truck cone
4.65" - 6.8" (118-174 mm)

GAR124 Spacer
May be used with GAR112 and the #8,9,10,11 collets



LARGE DIGITAL DISPLAY
Integrated keyboard





TIRE CHANGERS

WHEEL BALANCERS



ALIGNMENT RUNWAY LIFTS

ALIGNMENT SYSTEMS



Rotary's line of premium equipment is manufactured to the highest standards of quality and durability to help you perform the job right the first time, every time.

Offer your customers top quality tire and wheel service by putting Rotary to work for you.

Rotary Wheel Service Equipment

2700 Lanier Drive / Madison, IN 47250, USA

www.rotarywheelservice.com



North / South America Information

Sales:
800.640.5438
userlink@rotarylif.com

Tech. Support:
800.445.5438
techlink@rotarylif.com

Global Contact Information

USA: 1.812.273.1622
Canada: 1.905.812.9920
Latin America / Caribbean: 1.812.273.1622
Brazil: +55.11.4534.1995

Government Sales: 800.445.5438 X5655



For additional information:
rotarylif.com/Government-Purchasing-Assistance/

Lit# **Rotary Wheel Service Balancers Brochure.2019.10**

©2019 VEHICLE SERVICE GROUPSM. Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUPSM, DOVER and all other trademarks are property of Dover Corporation and its affiliates.

Rotary wheel aligners are manufactured using the following patents:
US Patent No. 9,453,724.B2 / US Patent No. 9,300,864 B2

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.